



Remove old fan motor & secure plate to the shroud using the 3 socket screws

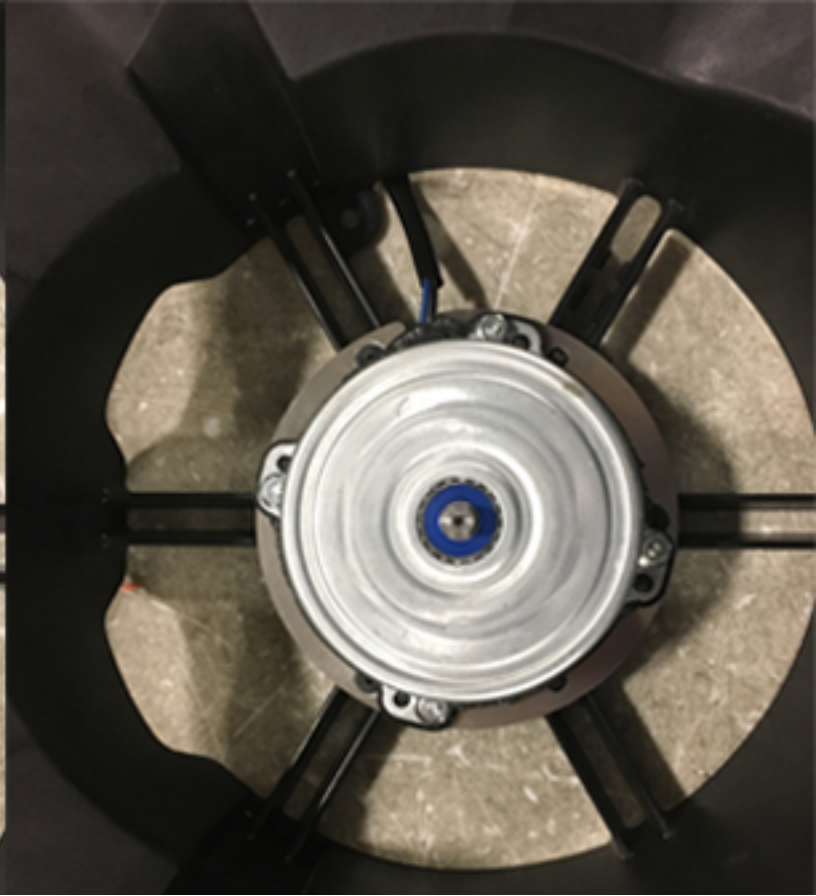

Set new SPAL fan motor on plate and secure with the 4 flange nuts

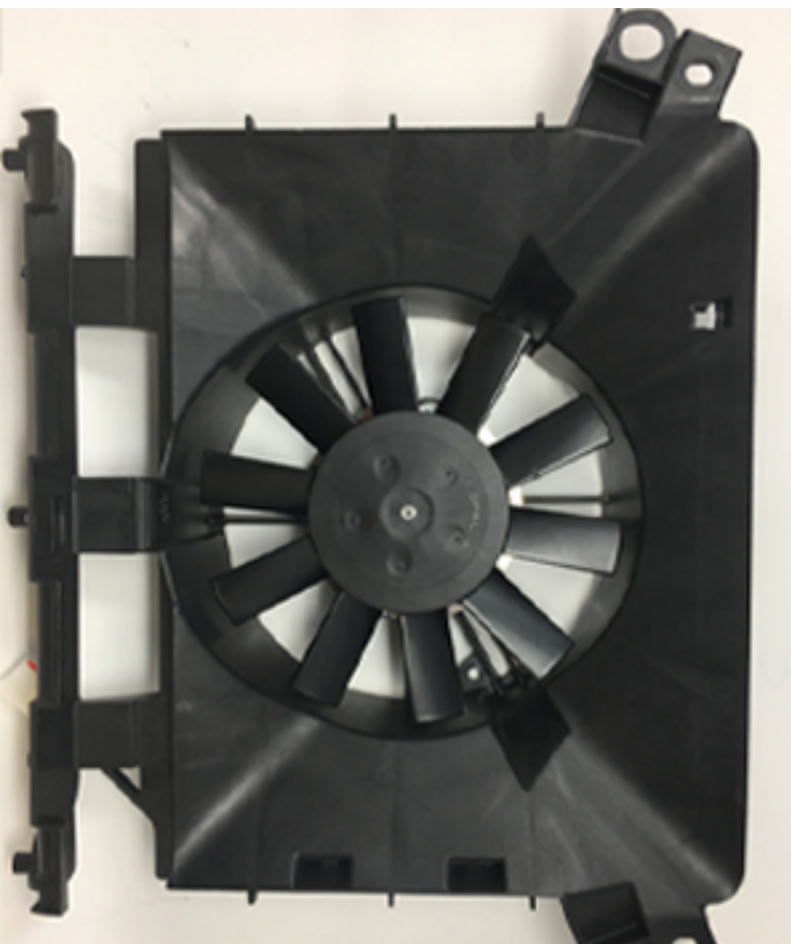

Set shaft pin then install fan blade and secure down with snap ring.



May need to remove orig OE connector and reuse on new motor wiring pins.